



For EPN
 C79/C90/C91/C92
 CX3900/CX4900/Cx5600
 /CX5900/CX6900F
 /CX5000/CX6000
 D78/D92/
 DX4000/DX4050/DX5000
 /DX5050/DX6000/DX6050
 /Dx7000f

This packing including

- 1). Continuous ink system 1 Set
- 2). Pipeline Clincher or Arm Support 1 Set
- 3). Installation Instruction 1 Copy
- 4). Syringe 1 Set

Attention


1. Not drinkable, keep it out of the reach of children
2. Avoid exposure to direct sunshine and don't keep it at the high or freezing temperature.
3. Avoid collision and falling down.
4. Please do not take out the cartridges at random after installing the ink system.
5. Using it in the temperature of 10-40°C
6. The ink system has passed the strict compatible checking, so we suggest using our ink and cartridges to keep the printing quality.
7. Mixing two different brand inks into the ink system is not recommended.

8. Keep the ink tanks and printer in the same level. Do not place the tanks higher or lower than their printer

Refill ink

When filling ink, you should pull out the rubber plugs from the sprue of the ink cartridge, use a common syringe to connect to the sprue, pull the syringe piston for air-removing, the inks will then flow into the ink cartridge automatically. After filling, stuff the rubber plug.

When the inks of ink tanks are low than the INK LEVEL(ink image on the surface of tanks), you must need to refill inks.



OPEN LEFT COVERS

FILL INK WITH A SYRINGE WITH NEEDLE





NEED REMOVE AIR WHEN FILL INK INTO EMPTY INK SYSTEM AT 1ST TIME

Tanks work :

① OPEN LEFT COVERS

② REPLACE ALL THE PLUGS to 'L' PLUGS

③ CLOSE LEFT COVERS



WHEN WORKS. OPEN ALL THE PLUGS ON ARROW SIDES



For EPN

- C79/C90/C91/C92
- CX3900/CX4900/Cx5600 /CX5900/CX6900F
- /CX5000/CX6000
- D78/D92/
- DX4000/DX4050/DX5000 /DX5050/DX6000/DX6050 /Dx7000f



Continuous ink system
 Continuous ink supply system
 Continuous ink flow system
 Continuous ink feed system
 Bulk ink system

Unpacking Instruction

- 1).Continuous ink system 1 Set 2). Pipeline Clincher or Arm Support 1 Set 3).Installation Instruction 1 Copy 4).Syringe 1 Set


Note

1. Not drinkable, keep it out of the reach of children
2. Avoid exposure to direct sunshine and don't keep it at the high or freezing temperature.
3. Avoid collision and falling down.
4. Please do not take out the cartridges at random after installing the CIS ink system.
5. Using it in the temperature of 10-40°C
6. The CIS ink system has passed the strict compatible checking, so we suggest using our ink and cartridges to keep the printing quality.
7. Mixing two different brand inks into the CIS ink system is not recommended.


8. Keep the ink tanks and printer in the same level. Do not place the tanks higher or lower than their printer

Refilling ink

When filling ink , you should pull out the rubber plugs from the sprue of the ink cartridge, use a common syringe to connect to the sprue, pull the syringe piston for air-removing, the inks will then flow into the ink cartridge automatically. After filling, stuff the rubber




FILL INK TO THIS LINE
 (Only for reference)



WHEN FILLING OPEN ALL PLUGS







NEED DRAW AIR WHEN FILL INK INTO EMPTY CIS AT 1ST TIME



FILL FULL INK
 (Not recommended)

Tank working

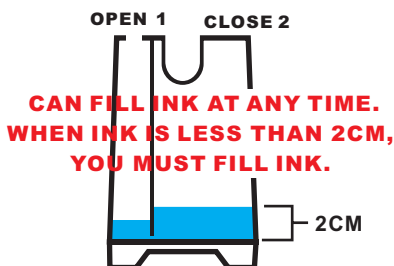


Insert an original cartridge (when need)

In general time, this ink system do not need an original cartridge when works.



If you face printer version problem, please notice as below.

Insert the original cartridge with its chip well-contact with the spring.



Make sure the chips can be touched well with the springs.

The springs should touch these points


- 1 Press the Power Button When the cartridge moves, pull out the power cord.. ▲



- 2 Open the carriage cover to certain angle (about 60 degrees). Then use a screwdriver to insert into the joint as the picture shows. Turn the screwdriver clockwise and lift the cover and then it can be removed. Make the right side of the cover separate with the carriage.



- 3 Take out the original carts. Move the carriage to the left side. Insert the CISS cartridge in the same way as the picture shows. Move the carriage to its original place. Then install the CISS carts well.




- 4 Stick the support arm in the place as the picture shows. Then stick another support arm over the first one. Stick the short support arm parallelly as the above picture shows.



- 5 Clip the tube. Move the carriage to the rightmost and make sure that the tube can be straight. Installation is finished.

Reset cartridges:



The ink will be showed less and less when printing, as the original cartridges. At last ,the computer will tell you to replace cartridge . Keep the power, open the cover of printer, do not need to remove the CIS cartridges , then press the switch on the cartridge for 1 times, and restart the printer for 1 times , ok. Some version cartridges are 2 switches design, when do not use the original cartridge, place in '2' position. When in '1' position, must use an original cartridge. A brand new original cartridge is recommended

