

For EPN

• R800/R1800



This packing including

- 1). Continuous ink system 1 Set
- 2). Pipeline Clincher or Arm Support 1 Set
- 3). Installation Instruction 1 Copy
- 4). Syringe 1 Set

Attention


1. Not drinkable, keep it out of the reach of children
2. Avoid exposure to direct sunshine and don't keep it at the high or freezing temperature.
3. Avoid collision and falling down.
4. Please do not take out the cartridges at random after installing the ink system.
5. Using it in the temperature of 10-40°C
6. The ink system has passed the strict compatible checking, so we suggest using our ink and cartridges to keep the printing quality.
7. Mixing two different brand inks into the ink system is not recommended.

8. Keep the ink tanks and printer in the same level. Do not place the tanks higher or lower than their printer

Refill ink

When filling ink, you should pull out the rubber plugs from the sprue of the ink cartridge, use a common syringe to connect to the sprue, pull the syringe piston for air-removing, the inks will then flow into the ink cartridge automatically. After filling, stuff the rubber plug.

When the inks of ink tanks are low than the INK LEVEL (ink image on the surface of tanks), you must need to refill inks.



OPEN LEFT COVERS

FILL INK WITH A SYRINGE WITH NEEDLE





NEED REMOVE AIR WHEN FILL INK INTO EMPTY INK SYSTEM AT 1ST TIME

Tanks work :

① OPEN LEFT COVERS

② REPLACE ALL THE PLUGS to 'L' PLUGS

③ CLOSE LEFT COVERS



WHEN WORKS. OPEN ALL THE PLUGS ON ARROW SIDES



For EPN

- R800/R1800

- 💧 Continuous ink system
- 💧 Continuous ink supply system
- 💧 Continuous ink flow system
- 💧 Continuous ink feed system
- 💧 Bulk ink system

Unpacking Instruction

1. CIS ink system (Continuous ink system) 1 Set
2. Pipeline Clincher or Arm Support 1 Set
3. Installation Instruction 1 Copy
4. Syringe 1 Set


Note

1. Not drinkable, keep it out of the reach of children
2. Avoid exposure to direct sunshine and don't keep it at the high or freezing temperature.
3. Avoid collision and falling down.
4. Please do not take out the cartridges at random after installing the CIS ink system.
5. Using it in the temperature of 10-40°C
6. The CIS ink system has passed the strict compatible checking, so we suggest using our ink and cartridges to keep the printing quality.
7. Mixing two different brand inks into the CIS ink system is not recommended.


8. Keep the ink tanks and printer in the same level. Do not place the tanks higher or lower than their printer

Refilling ink


When filling ink, you should pull out the rubber plugs from the sprue of the ink cartridge, use a common syringe to connect to the sprue, pull the syringe piston for air-removing, the inks will then flow into the ink cartridge automatically. After filling, stuff the rubber




FILL INK TO THIS LINE
(Only for reference)



WHEN FILLING
OPEN ALL PLUGS






NEED SUCK AIR
WHEN FILL INK
INTO EMPTY CARTRIDGE
AT 1ST TIME



FILL FULL INK
(Not recommended)

Tanks working :

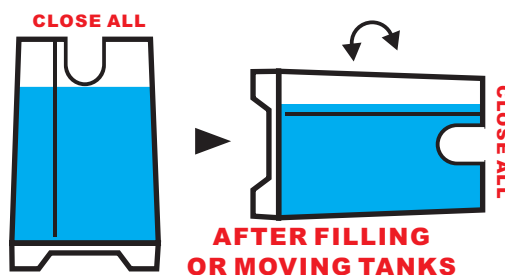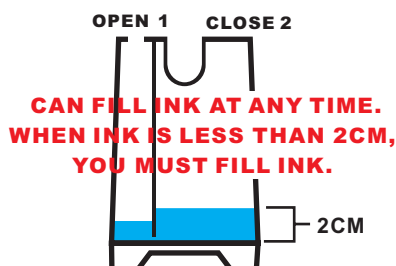

- 1 ▲ Press the "ink cartridge replace Button"
Move the cartridge to the cartridge to cartridge remove position
Unplug the power connector



- 2 ▲ Remove out the original cartridges ,then place down each cartridge according to the color ,in the meantime, make every cartridge in the correct position.
Rip the label
Stick the Support arm at 7.5cm distance from the side of the printer
Rip the on the balance arm



- 3 ▲ Fix the balance arm stick on the support arm as show on the picture, Rip the label on the shortest arm ,And Stick it on the right side of the printer, but need to keep it in the same horizontal line as show in the picture



- 4 ▲ Clip the tubes orderly on the arm, please kindly to see the above picture for reference.




- 5 ▲ Adjust the tube length and move the cartridge car. Insure there will no block and collision when the tubes moving with cartridge car .Insure there's plenty length of tube to make the cartridge cart can thoroughly move to the right side.



- 6 ▲ Left picture: The tube is excessive long, it is not ok.
Middle picture: The tube is twist ,it is not ok.
Right picture: In this situation ,it is ok

Reset cartridges:



The ink will be showed less and lessr when printing, as the original cartridges. The chips for CIS can auto reset when the printer show '0' capacity ink. If use for a long time ,the computer tells you to replace cartridge doesn't work, **Power off the printer for 1 minute, then restart ok.**