

● For (HP 02/177/363/801)



- 💧 Continuous ink system
- 💧 Continuous ink supply system
- 💧 Continuous ink flow system
- 💧 Continuous ink feed system
- 💧 Bulk ink system

Unpacking Instruction


- 1).Continuous ink system 1 Set 2). Pipeline Clincher or Arm Support 1 Set 3).Installation Instruction 1 Copy 4).Syringe 1 Set

Attention

1. Not drinkable, keep it out of the reach of children
2. Avoid exposure to direct sunshine and don't keep it at the high or freezing temperature.
3. Avoid collision and falling down.
4. Please do not take out the cartridges at random after installing the ink system.
5. Using it in the temperature of 10-40°C
6. The ink system has passed the strict compatible checking, so we suggest using our ink and cartridges to keep the printing quality.
7. Mixing two different brand inks into the ink system is not recommended.

8. Keep the ink tanks and printer in the same level. Do not place the tanks higher or lower than their printer

Refill ink





**OPEN LEFT COVERS,
FILL INK WITH A
SYRINGE WITH
NEEDLE**

When filling ink , remove all the rubber plugs from the sprue of the ink cartridge, use a common syringe to connect to the sprue, pull the syringe piston for air-removing, and open the covers of cartridges, hold the tanks high up, the ink will then flow into the ink cartridge automatically. After filling, stuff the rubber plugs and cartridge covers.

Tanks work :

- 1 OPEN LEFT COVERS
- 2 REPLACE ALL THE PLUGS to ' L ' PLUGS
- 3 CLOSE LEFT COVERS



WHEN WORKS. OPEN ALL THE PLUGS ON ARROW SIDES

● For (HP 02/177/363/801)



- 💧 Continuous ink system
- 💧 Continuous ink supply system
- 💧 Continuous ink flow system
- 💧 Continuous ink feed system
- 💧 Bulk ink system

Unpacking Instruction



- 1).Continuous ink system 1 Set 2). Pipeline Clincher or Arm Support 1 Set 3).Installation Instruction 1 Copy 4).Syringe 1 Set

Note


1. Not drinkable, keep it out of the reach of children
2. Avoid exposure to direct sunshine and don't keep it at the high or freezing temperature.
3. Avoid collision and falling down.
4. Please do not take out the cartridges at random after installing the CIS ink system.
5. Using it in the temperature of 10-40°C
6. The CIS ink system has passed the strict compatible checking, so we suggest using our ink and cartridges to keep the printing quality.
7. Mixing two different brand inks into the CIS ink system is not recommended.

8. Keep the ink tanks and printer in the same level. Do not place the tanks higher or lower than their printer

Refilling ink



Tanks working :

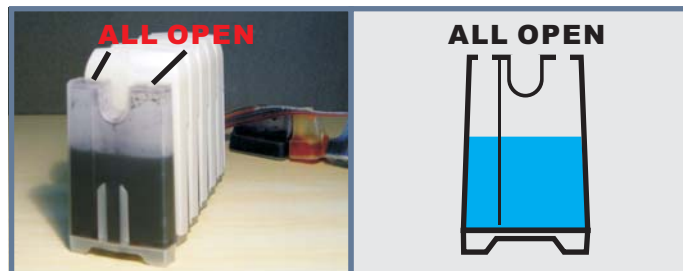



Please open all the plugs on the ink tanks when printing

Notice for the cartridges models

For the same model printer, there will be different model cartridges in different countries
Before you install CIS cartridges, please make sure the right model cartridges
Please choose CIS model only by your original cartridge model, not by the printer model



- 1 Open the top cover, take out the original cartridges. Before you install the CIS cartridges, please make clear the chip position and make sure that each color cartridge will be installed in the correct position. Install the CIS cartridges from left to right.

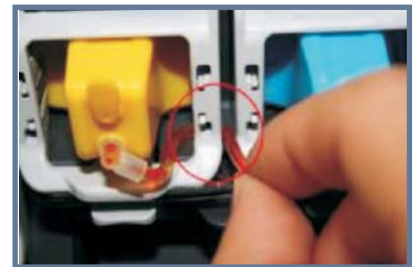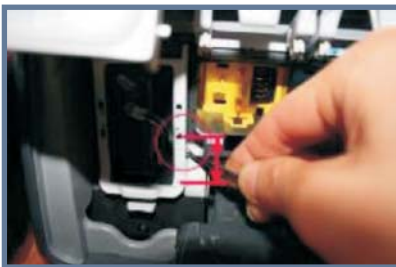

- 2 Close the top cover. Thread the tube through the cartridges clip. Tear the tubes among the cartridges about 2 cm it will be easier to install the color cartridges. Make sure the tube line between each two clips are not folded. Pull the tube slightly to see if it is installed well.



- 3 Install the other cartridges according to the above operations. Stick the support arm on the printer to fix the tube line. Installation finished.



For some models, the ink tanks also can be placed on the left of printer

If the indicator light flashing when printing, it tells that you need to reset the chip to full status. Please turn off your printer for about 30 seconds and switch it back on. Ink meter bar shall show full ink. You can start printing as usual.